



Peerless Data Sheet

Type: HDS 134 WR 26 90 PPB AL 8 OHM - 830860



Electrical data

Nominal impedance	Zn	8 (ohm)
Minimum imp./at freq.	Zmin	6.1/410 (ohm/Hz)
Maximum impedance	Zo	33.2 (ohm)
Dc resistance	Re	5.7 (ohm)
Voice coil inductance	Le	0.6 (mH)

TS Parameters

Resonance Frequency	fs	56.1 (Hz)
Mechanical Q factor	Qms	2.41
Electrical Q factor	Qes	0.50
Total Q factor	Qts	0.41

Force factor	Bl	5.7 (Tm)
Mechanical resistance	Rms	1.19 (Kg/s)
Moving mass	Mms	8.1 (g)
Suspens. compliance	Cms	0.99 (mm/N)
Effective cone diam.	D	10.6 (cm)
Effective piston area	Sd	88 (cm ²)
Equivalent volume	Vas	10.6 (ltrs)
SPL 2.83V/1m at fmin		88.3 (dB)

Power handling

100h RMS noise test (IEC)	- (W)
Longterm Max System Power (IEC)	- (W)
IEC268-5 noise signal is used for the powertest.	

Voice coil and magnet parameters

Voice coil diameter	26.0 (mm)
Voice coil length	13.0 (mm)
Voice coil layers	2
Height of the gap	6.0 (mm)
Linear excursion +/-	3.5 (mm)
Max mech. excursion +/-	- (mm)
Total useful flux	0.8 (mWb)
Diameter of magnet	90 (mm)
Height of magnet	15 (mm)
Weight of magnet	0.4 (kg)

Factors


Ratio fs/Qts	136
Ratio BL/sqrt(Re)	2.4

Special remarks

-

Remarks on powertest

-

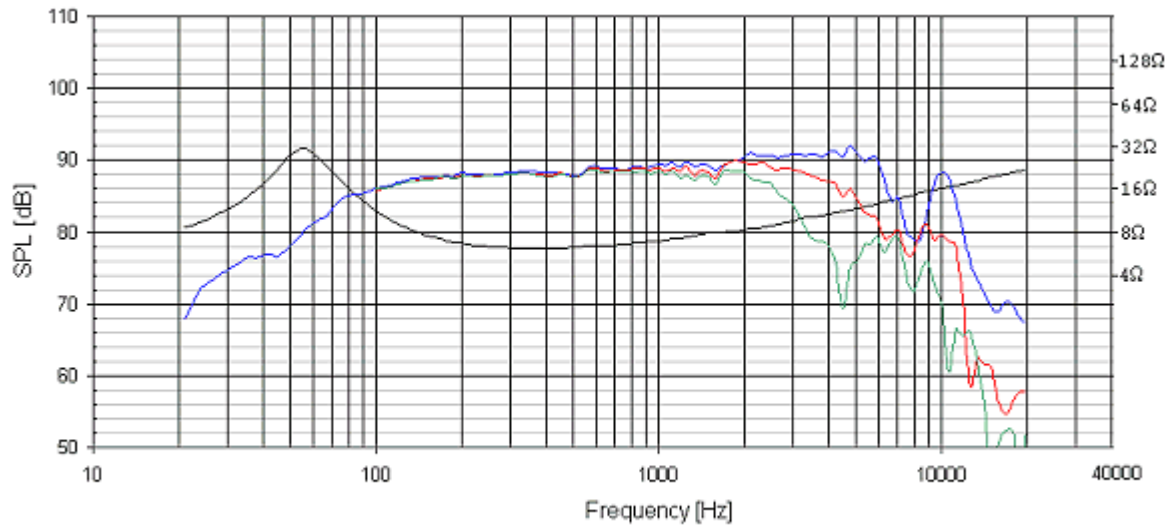

— Impedance — On axis — 30 degrees — 60 degrees

Measuring methods and conditions are stated in Peerless Standard for Acoustic Measurements (PSAM)