






THE KING OF TWEETERS











LL2-C120 Air motion tweeter



Sensitivity (2.83V / 1M): 94dB
Frequency range: 1500-30000Hz
Impedance: 6.4 ohm
Resonance frequency: 1200Hz
Lowest crossover frequency: 1500Hz
Power handling: 300W
Effective diaphragm area: 14cm²
Magnet type: Neodymium
Weight: 0.51Kg

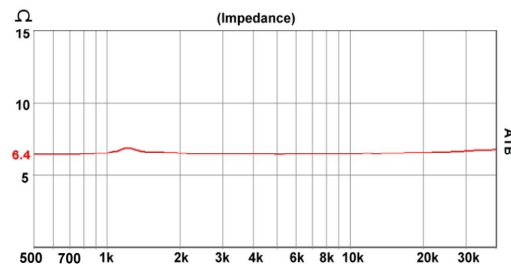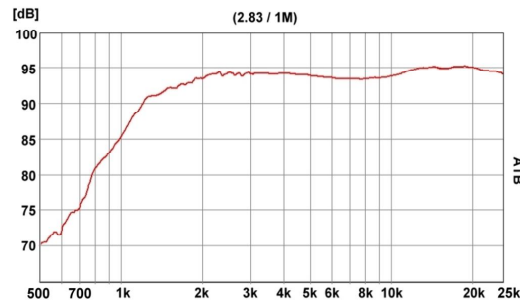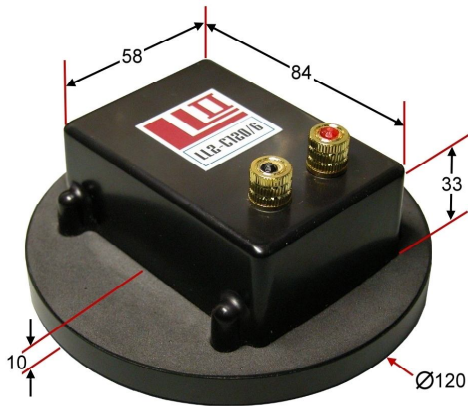

Reference applications for LL2-C120

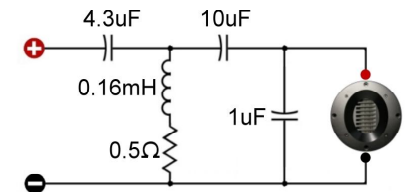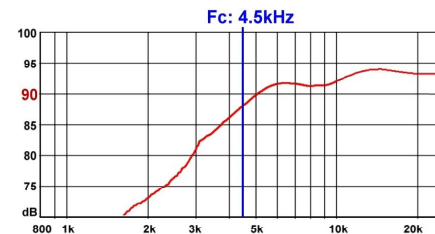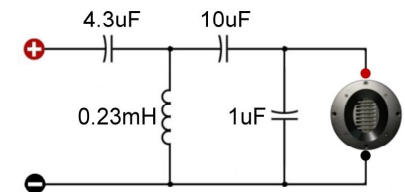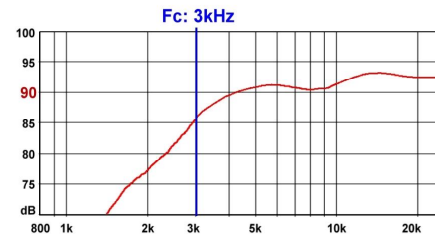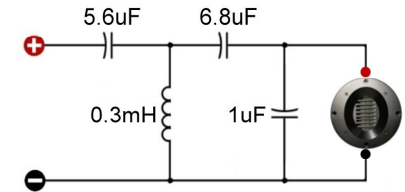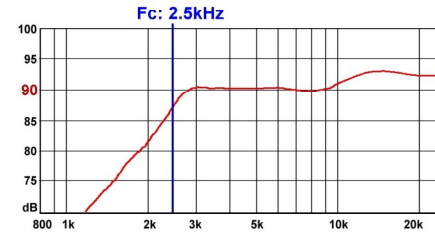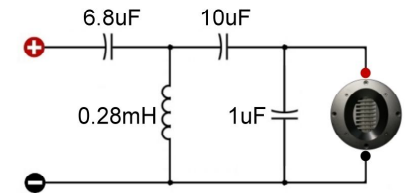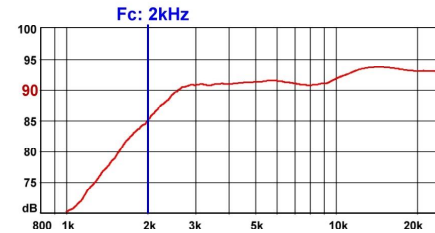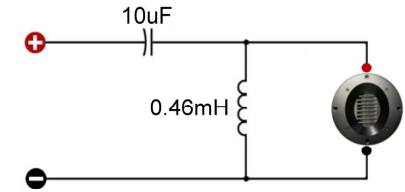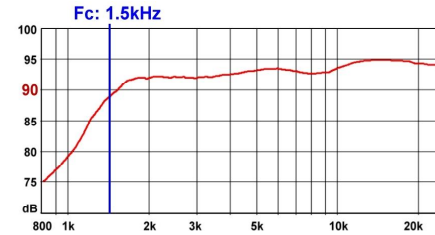

Made in Hong Kong

Designed by L.C.Y.

The microphone is placed at 1M on axis, the tweeter is flush-mounted on a baffle, measured under free field conditions with 2.83V power input.