


Full range 2 ways coaxial speaker
High impact polymer chassis - 25 mm Polymer dome
Gold plated terminals and built-in crossover (-6dB)

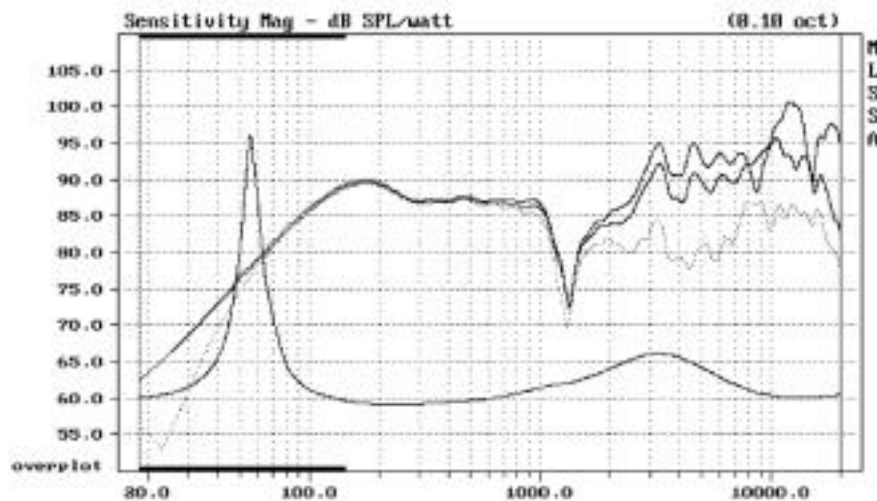

Nominal impedance... 4 ohms
Resonance... 57.6 Hz
Power handling (IEC)... 50 W
Sensitivity (2.83V/1m)... 87.0 dB

Resistance (DC)... 2.94 ohms
Inductance... 0.47 mH
Xmax... ± 4.0 mm
Qms... 6.00
Qes... 0.59
Qts... 0.53
Vas... 3.87 l

Voice coil diam... 30 mm
Voice coil length... 12 mm
Former... kapton
Layer(s)... 2
Wire type... round
Force factor... 3.90 NA
Moving mass... 8.40 gr

Cone material... coated paper
Suspension... rubber
Chassis... polymer
Total mass... 0.90 kg

