



NT1-204-8D 3/4" Titanium Dome Tweeter

Specifications:



Fs	2000	Hz
Nominal Imp.	8	ohms
Power (RMS)	15	W
Re	6.96	ohms
Sens. 1W/1m	88.5	dB
X-max peak	0.6	mm
Mms	0.16	gr
VC diameter	20	mm

Features:

- Frequency 3kHz to 25kHz
- Titanium dome
- Underhung voice coil
- Neodymium magnet
- Inherently shielded
- Frame: 39mm square
- Overall Depth: 22mm
- Could be rear mounted, 3/4"
- **Don't touch the dome!!!**



Price Each \$15.90

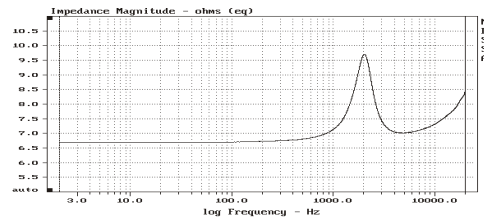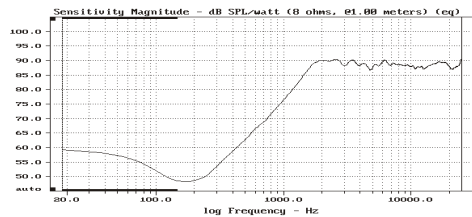

NSW1-205-8A 1" Extended Range

Specifications:



Fs	220	Hz
Nominal Imp.	8	ohms
Power (RMS)	5	W
Re	6.3	ohms
Sens. 1W/1m	78	dB
X-max peak	1.5	mm
Qms	2.1	
Qes	1.1	
Qts	0.7	
Vas	0.04	ltrs
BL	1.9	TM
Mms	0.50	gr
Cms	1155	$\mu\text{M/N}$
Sd	5.31	cm^2
Net weight	52.3	g
Max Exc. p2p	6	mm
VC diameter	20	mm

Features:

- Frequency 220 to 25kHz
- Titanium dome
- Underhung voice coil
- NRT neodymium magnet system
- Inherently shielded
- Foam surround
- Frame: 39mm square
- Overall Depth: 22mm



Price Each \$17.80

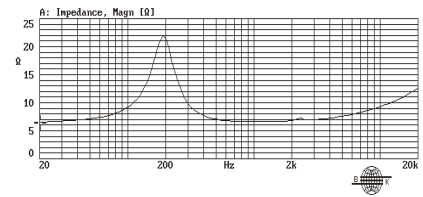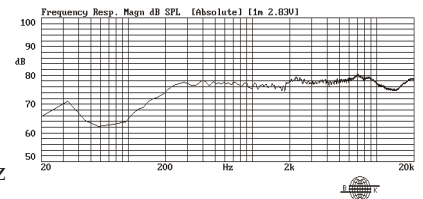

NSW2-326-8AT 2" Extended Range

Specifications:



Fs	250	Hz
Nominal Imp.	8	ohms
Power (RMS)	15	W
Re	6.4	ohms
Sens. 1W/1m	84	dB
X-max peak	3	mm
Qms	4.72	
Qes	0.80	
Qts	0.68	
Vas	0.1	ltrs
BL	3.5	TM
Mms	1.04	gr
Cms	390	$\mu\text{M/N}$
Sd	13.2	cm^2
Net weight	113	g
Max Exc. p2p	10	mm
VC diameter	33	mm

Features:

- Frequency 250 to 15kHz
- Titanium dome
- Underhung voice coil
- NRT neodymium magnet system
- Inherently shielded
- Foam surround
- Frame: 49mm square
- Overall Depth: 29.4mm



Price Each \$23.55

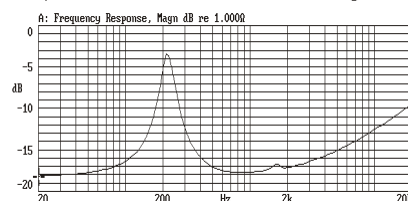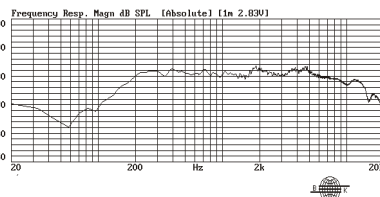

Also in stock without solder tabs as the NSW2-326-8A-120. Same price.



NS2x3-184-4A 2x3" Extended Range

Specifications:



Fs	220	Hz
Nominal Imp.	4	ohms
Power (RMS)	7.5	W
Re	3.5	ohms
Sens. 1W/1m	87	dB
X-max peak	0.43	mm
Qms	4.90	
Qes	1.90	
Qts	1.38	
Vas	0.38	ltrs
BL	1.8	TM
Mms	1.26	gr
Cms	410	$\mu\text{M/N}$
Sd	25.7	cm^2
Net weight	-	g
Max Exc. p2p	-	mm
VC diameter	18.4	mm

Features:

- Frequency 220 to 20kHz
- Paper cone
- Underhung voice coil
- NRT neodymium magnet system
- Inherently shielded
- Cloth/Rubber surround
- Frame: 50x90mm
- Overall Depth: 39.3mm



Price Each \$13.50

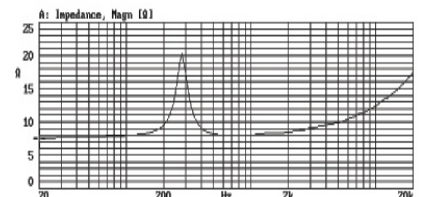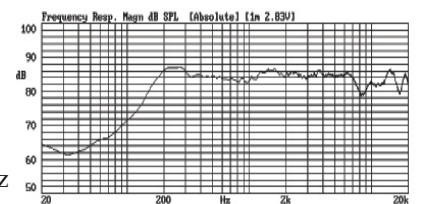



NS3-193-4A/8A & 4A1/8A1 3" Extended Range



NS12-794-4A 12" Subwoofer

Specifications:



	4Ω	8Ω
Fs	78	80 Hz
Power (RMS)	20	20 W
Re	3.5	7.6 ohms
Sens. 1W/1m	80	80 dB
X-max peak	4.75	5 mm
Qms	9.0	8.0
Qes	0.62	0.73
Qts	0.58	0.67
Vas	1.27	1.25 ltrs
BL	3.5	4.7 TM
Mms	4.5	4.3 gr
Cms	925	920 μM/N
Sd	31	31 cm ²
Net weight	216	216 g
VC diameter	19.3	19.3 mm



▲ drivers have silver cones and ▲1 have black cones

Price Each \$21.00

Recommended Enclosure for F3 of 85Hz: 3 to 6 liters (0.1 to 0.2 cf)

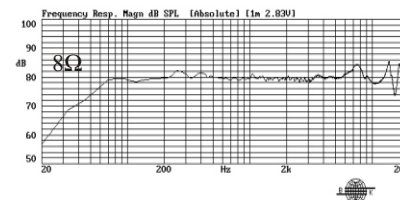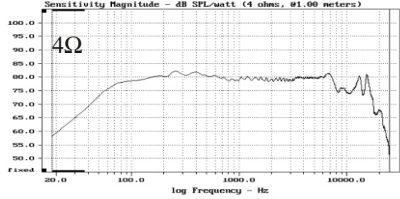

Features:



- Frequency 80 to 7kHz
- Low distortion
- Aluminum cone
- Underhung voice coil
- NRT neodymium magnet system
- Inherently shielded
- Rubber surround
- Frame: 105mm
- Depth: 66mm

Specifications:

Fs	27	Hz
Nominal Imp.	4	ohms
Power (RMS)	400	W
Re	3.5	ohms
Sens. 1W/1m	84	dB
X-max peak	18	mm
Qms	7.1	
Qes	0.45	
Qts	0.43	
Vas	78	ltrs
BL	14	TM
Mms	152	gr
Cms	233	μM/N
Sd	487	cm ²
Net weight	8.0	kg
Max Exc. p2p	60	mm
VC diameter	79.4	mm



Price Each \$548.00

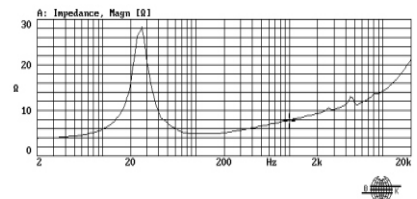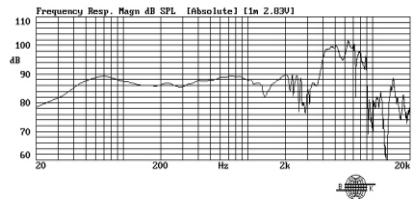

- Frequency Fo to 1.5kHz
- Aluminum Cone - black
- Underhung voice coil
- NRT neodymium magnet system
- Inherently shielded
- Rubber surround
- Frame: 317mm
- Cut out: 280mm
- Depth: 202mm

Recommended Enclosure for F3 of 25Hz: 3.5 cubic feet with 4" Ø vent by 12" long



NS18-992-4A 18" Subwoofer





AST-2B-4 Pro Bass Shaker

Specifications:

Fs	20	Hz
Nominal Imp.	4	ohms
Power (RMS)	800	W
Re	3.1	ohms
Sens. 1W/1m	86	dB
X-max peak	25	mm
Qms	7.7	
Qes	0.5	
Qts	0.47	
Vas	322	ltrs
BL	17	TM
Mms	400	gr
Cms	170	μM/N
Sd	1164	cm ²
Net weight	19.7	kg
Max Exc. p2p	75	mm
VC diameter	99.2	mm



Price Each \$905.00

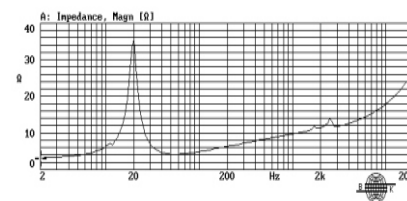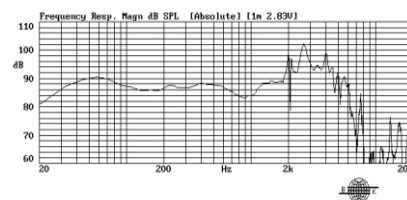

Recommended Enclosure for F3 of 35Hz: 4.5 cubic feet sealed and stuffed

- Frequency Fo to 1.5kHz
- Aluminum Cone - black
- Underhung voice coil
- NRT neodymium magnet system
- Inherently shielded
- Rubber surround
- Frame: 477mm
- Cut out: 426.4mm
- Depth: 287.1mm

50Watt RMS Continuous
4 ohm
6.2" in diameter, 2.2" tall
Fs 40Hz
Peak Force 30lbf (132N)
Weight 3 lbs

Price Each \$55.95



Want to feel your music? The Bass Shaker products allow you to experience every thump, thrust and shake...the way bass sound was originally intended. Aura's patented technology preserves the sound pressure levels so there's no distortion while enhancing the bass energy delivered from your stereo. We're taking surround sound to another level....

To add bass shakers to your home theater system, they need to be powered by an amplifier (50 to 100 watt recommended) and receive the same signal as your powered subwoofer. No crossover is needed. Bass shakers should be rigidly mounted to the bottom of your seat, whether it your car seat

Bass Shaker Frequency Response

