





R2904/700009

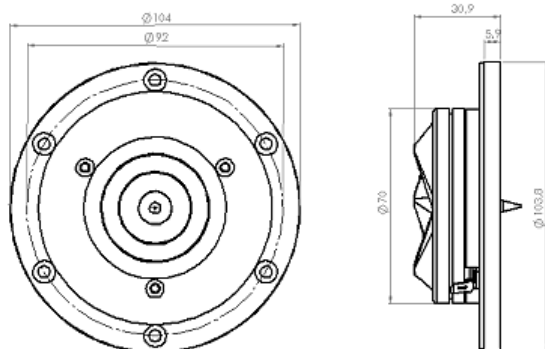

Characteristic sensitivity (2.83V / 1m)	:	94.5 dB
Recommended frequency range	:	2 - 40 kHz
Free air resonance frequency, fs	:	520 Hz
DC resistance, Re	:	3.0 ohm
Voice coil inductance, Le	:	0.01 mH
Effective piston area, Sd	:	5.6 cm ²
Moving mass incl. air, md	:	0.30 g
Force factor, BL	:	2.8 Tm
Excursion, lin. / max.	:	±0.20 / ±1.6 mm
Voice coil diameter	:	25 mm
Rated power handling	:	160 W (12 dB/oct. cross-over at 2.5 kHz)
Net weight	:	0.42 kg

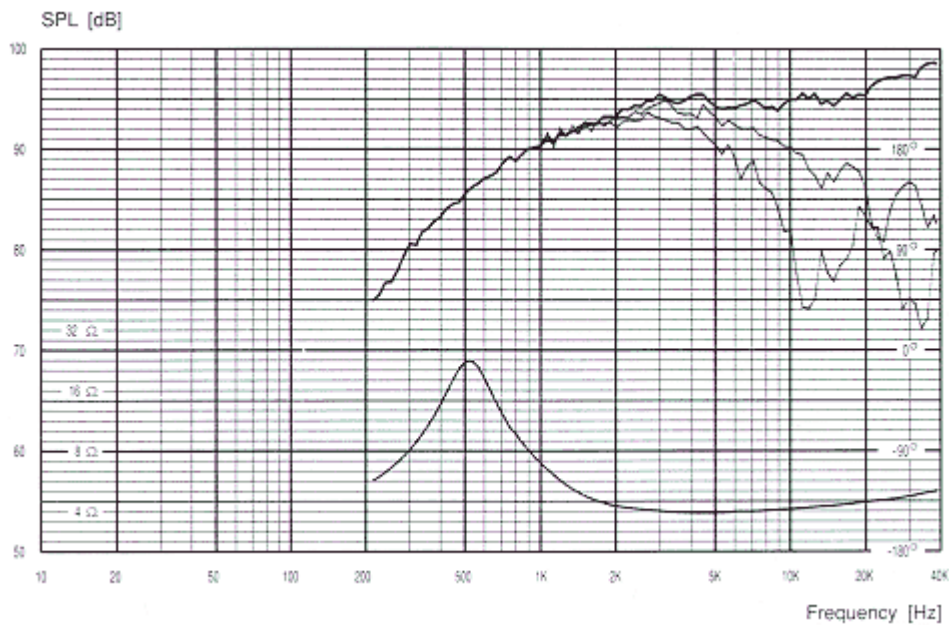

Frequency response: 2.83V / 1m