


# 1" NEODYM. TWEETER

# D26NC-05-06


**SPECIAL FEATURES:**

- VERY COMPACT CONSTRUCTION
- NEODYMIUM MAGNET
- "BUTTERFLY" VC ASSEMBLY
- MAGNETIC FLUID
- FABRIC DIAPHRAGM
- PREPARED FOR CUSTOMIZED FRONT

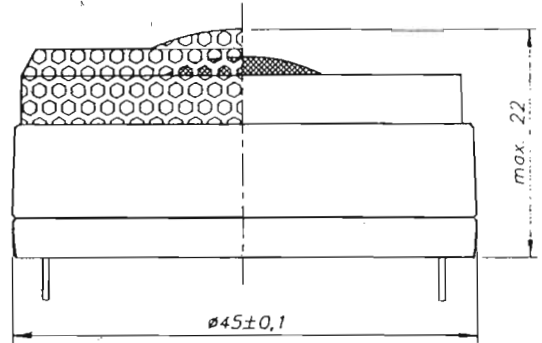

NOMINAL IMPEDANCE	6 Ω
NOMINAL POWER (IEC 268-5)	30 W
FREQUENCY RANGE	2,5-20 kHz
SENSITIVITY (1W, 1m)	88,5 dB
EFFECTIVE DIAPHRAGM AREA	7,1 cm <sup>2</sup>
VOICE COIL RESISTANCE	4,6 Ω
OPERATING POWER	5,6 W
VOICE COIL DIAMETER	25 mm
VOICE COIL HEIGHT	1,6 mm
AIR GAP HEIGHT	2 mm
FREE AIR RESONANCE	1800 Hz
MOVING MASS (incl. air)	0,27 g
FORCE FACTOR, B x l	2,5 Txm
MAGNET WEIGHT (0,4oz)	11 g

Front

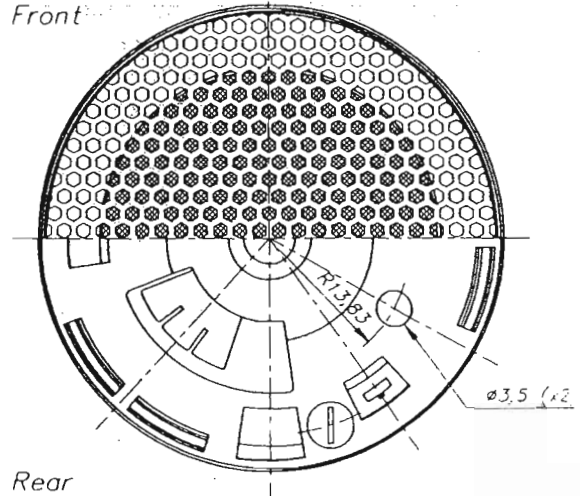

Rear



↑ Scale by 10      2K=20K