


Ultra stiff die cast chassis
Treated flat foam surround
High power handling capacity

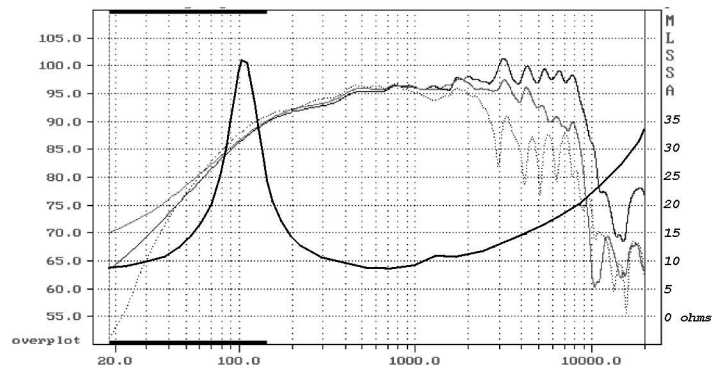

Nominal impedance... 8 ohms
Resonance... 117 Hz
Power handling (IEC) ... 100 W
Sensitivity (2.83V/1m) ... 100.0 dB

Resistance (DC)..... 6.2 ohms
Inductance 0.73 mH
Xmax..... ± 0.5 mm
Qms..... 3.16
Qes 0.61
Qts..... 0.51
Vas..... 5.52 l

Voice coil diam..... 40 mm
Voice coil length 7 mm
Former kapton
Layer(s) 1
Wire type flat
Force factor 8.24 NA
Moving mass..... 9.17 gr

Cone material paper
Suspension flat foam
Chassis..... zamack
Total mass..... 2.5 kg

